


LINEAR-42 STD

Generated from BSI lamp photometric test data: on road measurement data

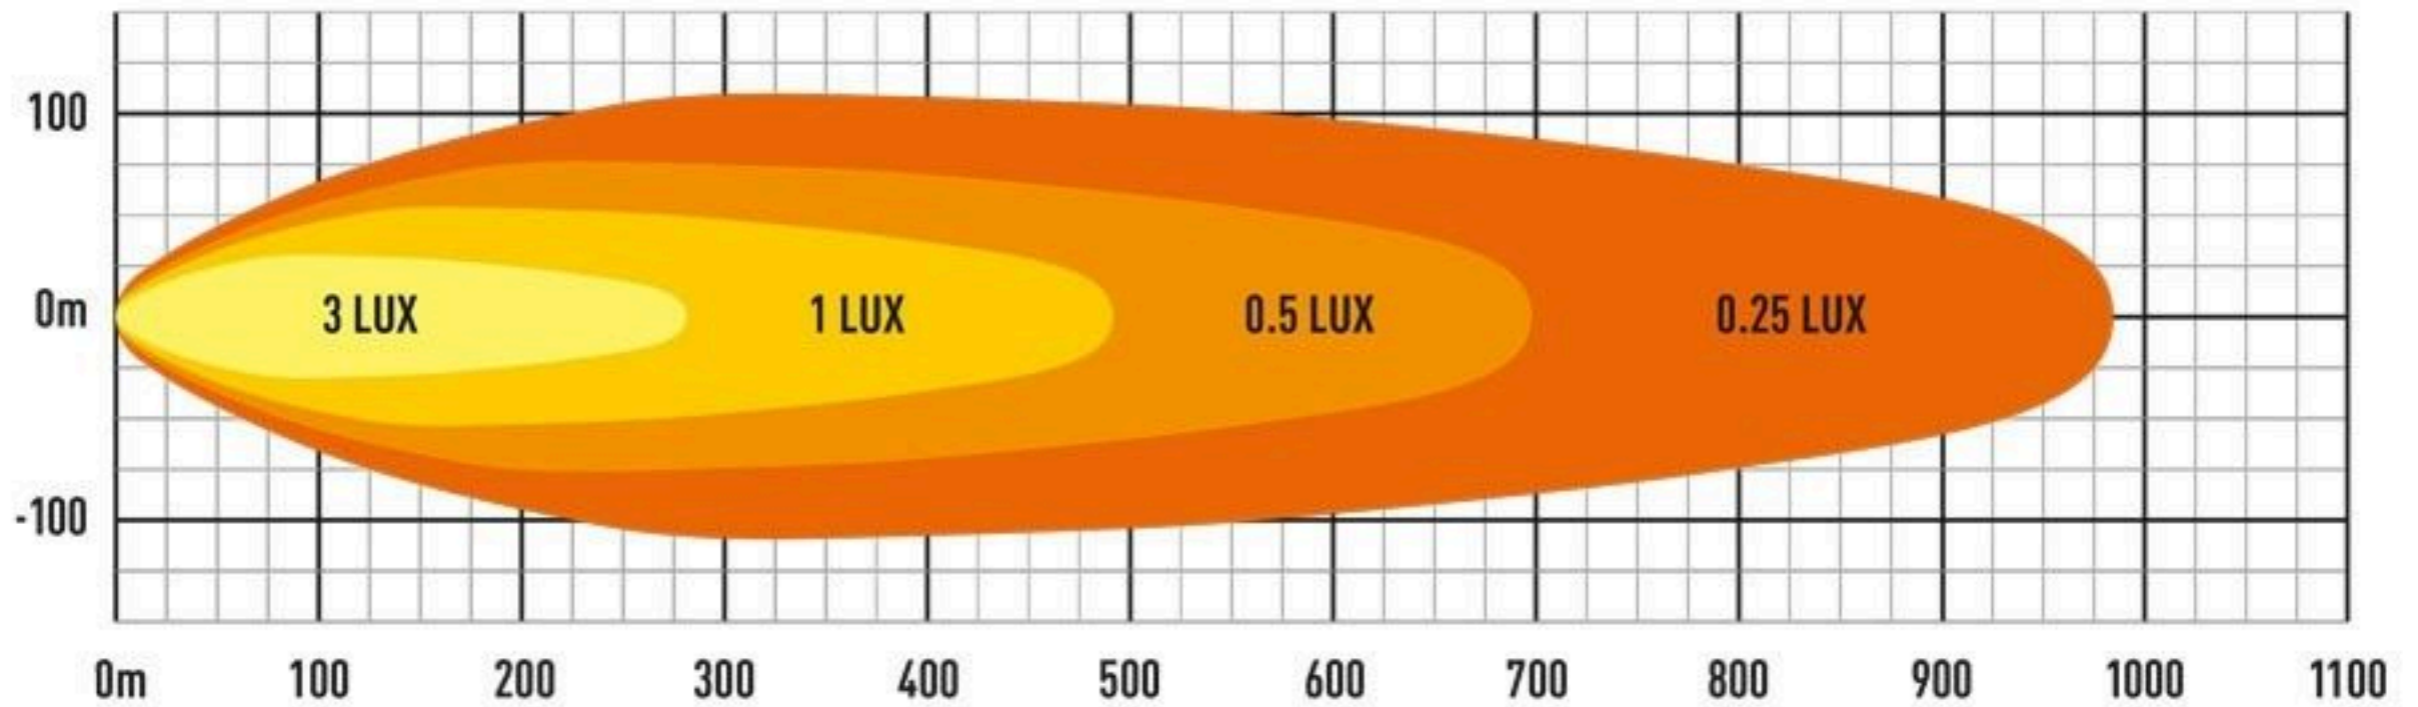

LAZER

HIGH PERFORMANCE LIGHTING


LINEAR 42

RAW LUMENS: 15,750 / 1 LUX @ 492m / E-MARK REF: 50



1m



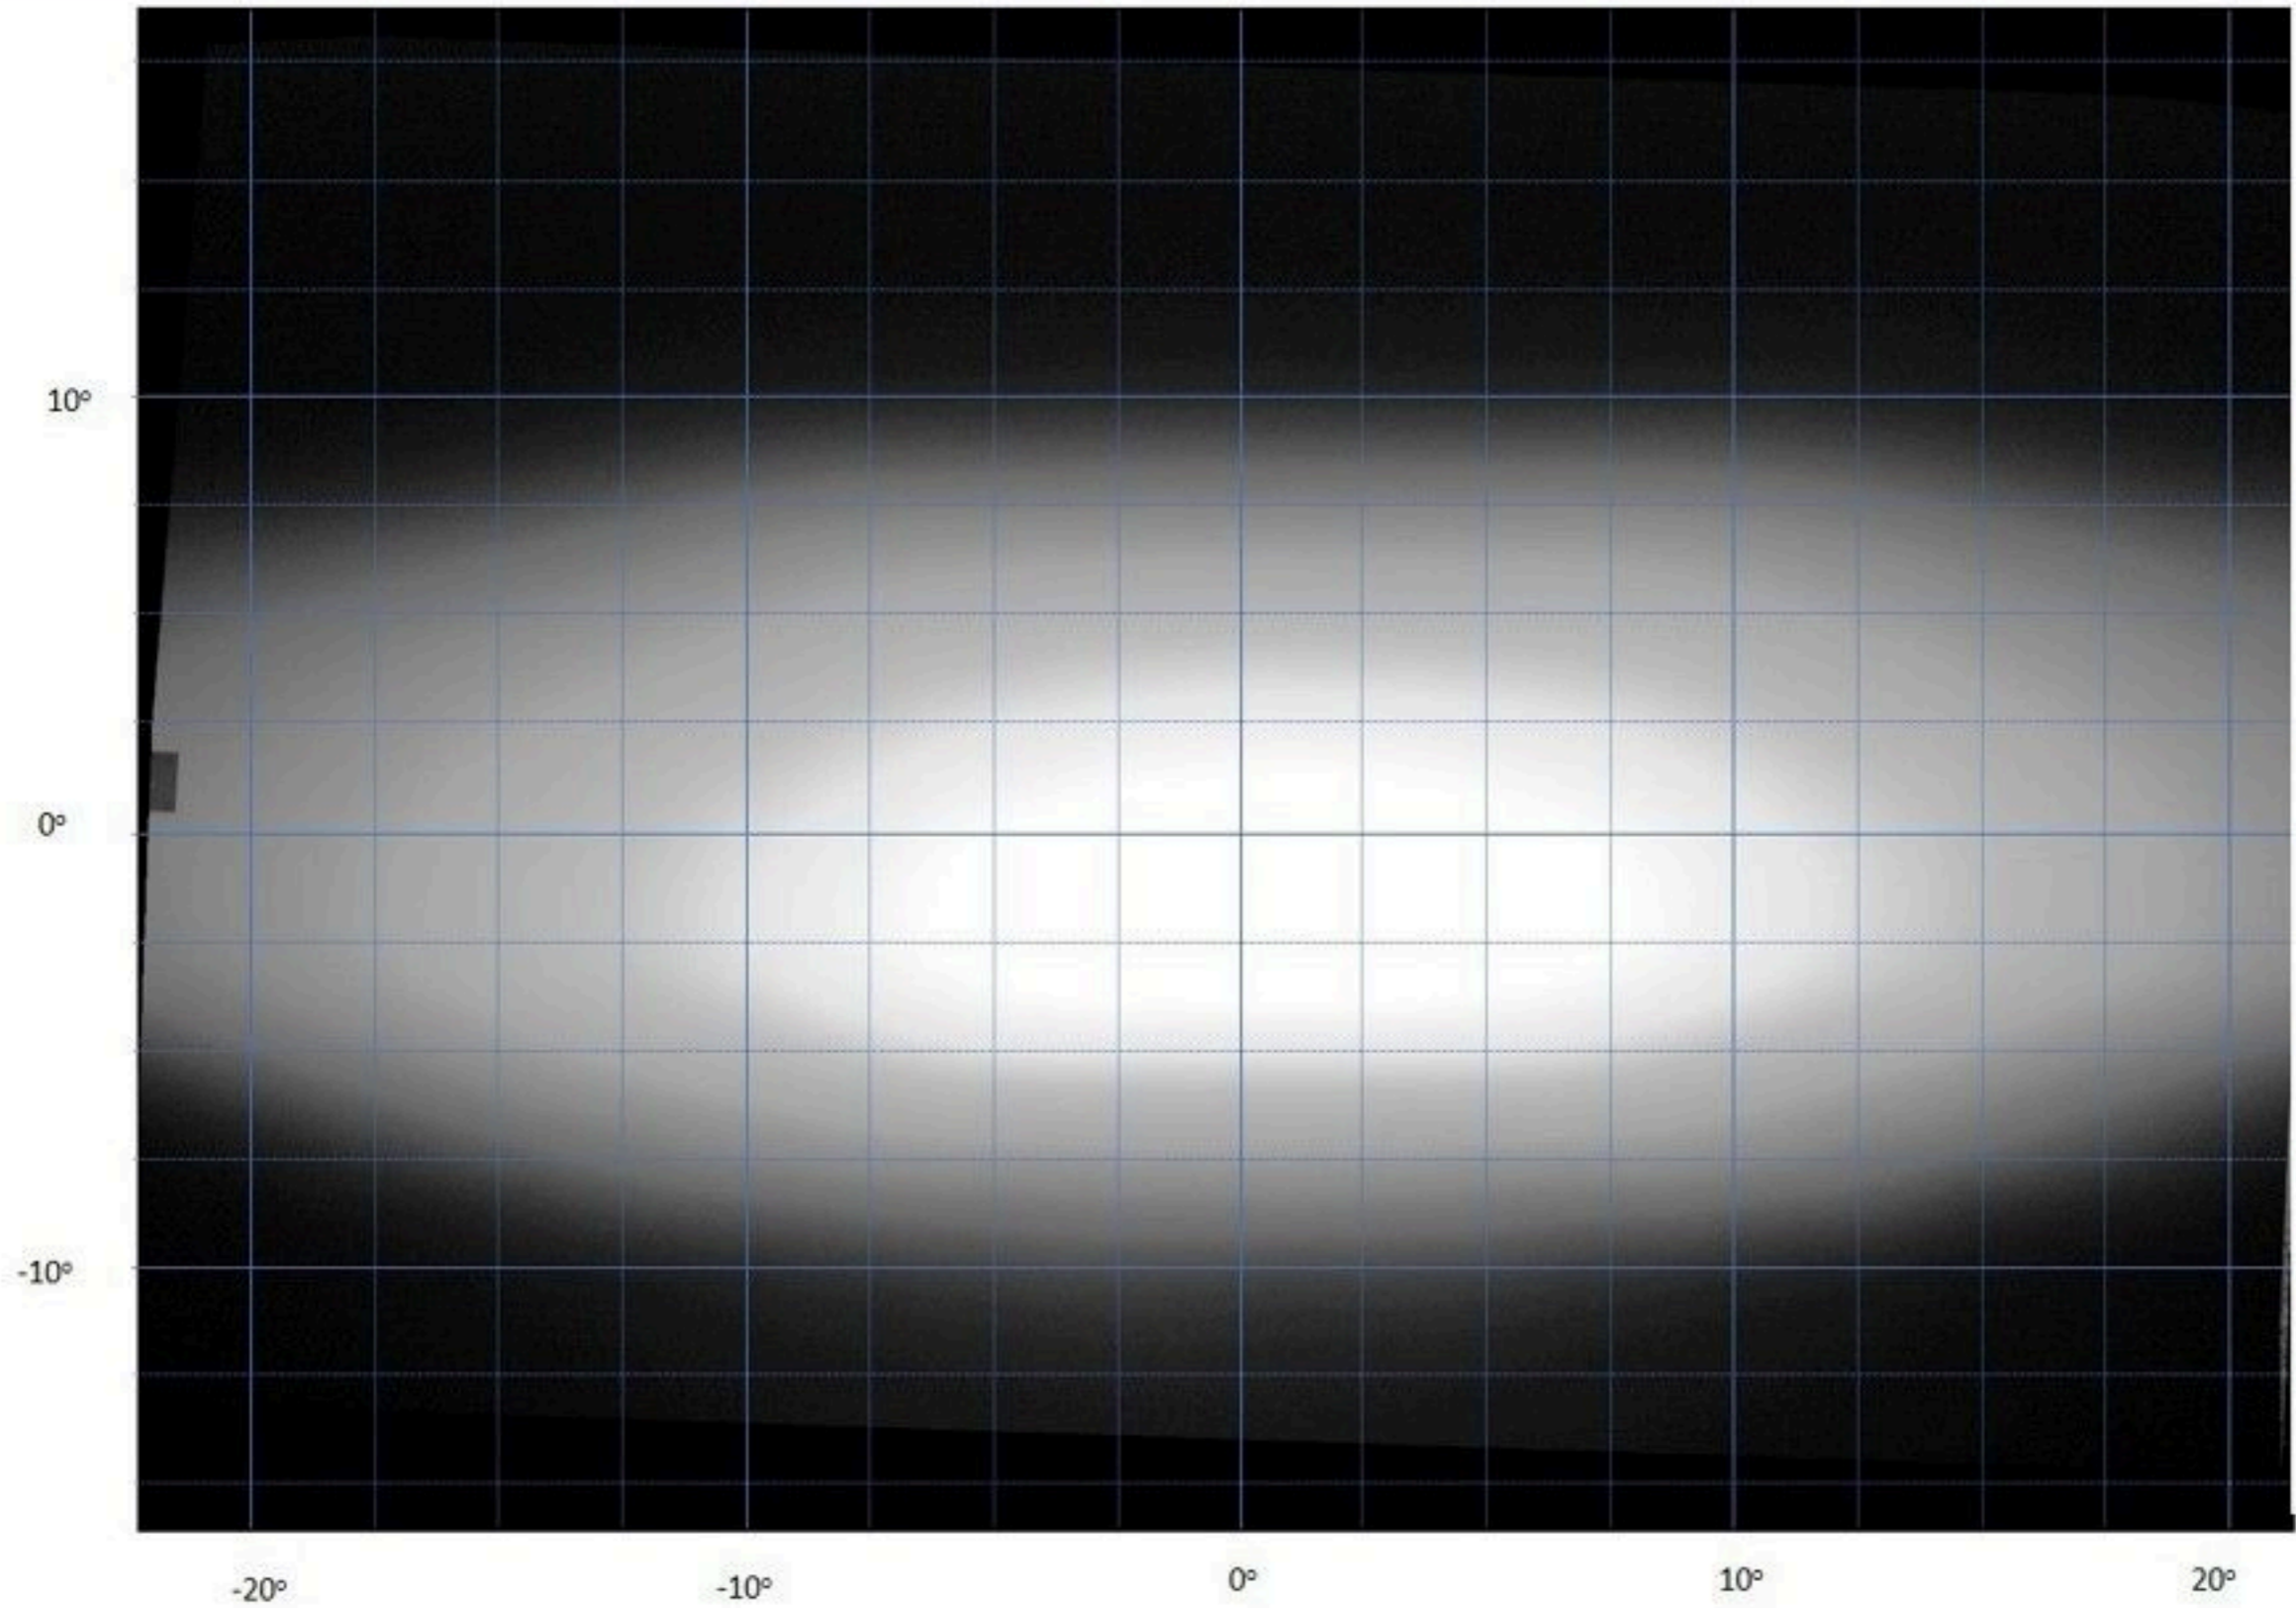



LINEAR

12
ELITE

LINEAR

UNBREAKABLE POLYCARBONATE LENS

with lifetime guarantee.

VACUUM- METALLISED OPTICS

deliver an optimal balance
of light intensity and left/right
spread illumination.

CORROSION RESISTANCE

to automotive grade
standards.

LOW PROFILE CROSS-SECTION

facilitates fitting into
compact spaces.

VARIOUS INSTALL OPTIONS

available including stainless steel
side, and centre mounting brackets.

E-MARK CERTIFICATION

across the entire Linear product range.

ANTI-THEFT MOUNTING BRACKETS

and fasteners available
(included across Elite range).

AERODYNAMIC DESIGN

reduces the wind noise affecting
other installations.

ADVANCED 3W LEDs

as used in Lazer Lamps 2018/9
WRC lighting solutions.

DYNAMIC DRIVE MODULATION

is maintained at the optimal level
considering environmental and thermal
conditions of the lamp.

