




ELECTRICAL CONNECTION

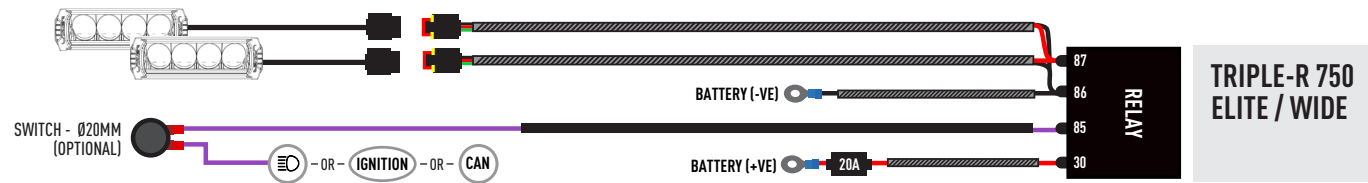

LAMP CONNECTOR INFORMATION

TRIPLE-R POSITION LIGHT FUNCTION (OPTIONAL)

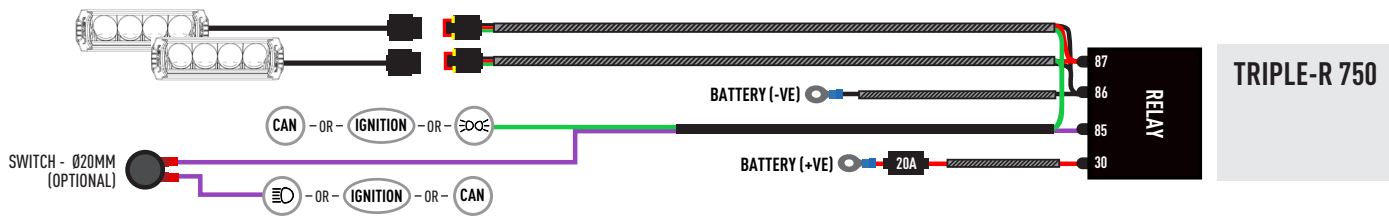

- 
- 

3


Diagram illustrating the removal of the outer jacket and the removal of the braided shield. A yellow arrow points to the outer jacket being removed. A yellow triangle with an exclamation mark indicates a warning. The text "PPD" is visible on the removed jacket.

4

Diagram illustrating the removal of the inner jacket and the removal of the shield. A yellow arrow points to the inner jacket being removed. A yellow triangle with an exclamation mark indicates a warning.

CANBUS INTEGRATION (SOLD SEPERATELY)

For vehicles where it is not possible to locate a 12V high beam signal, it will be necessary to take the high beam signal from the vehicle's CAN system. For connection options please visit the Lazer Lamps website, or contact your nearest dealer.

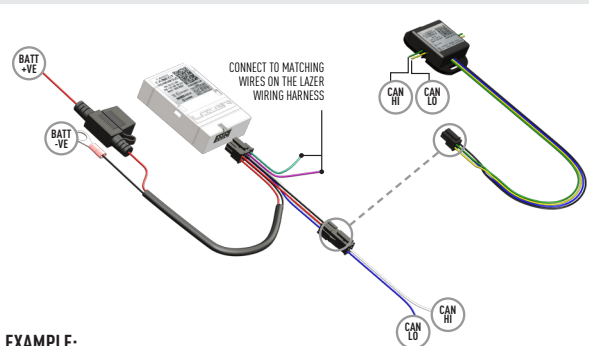

EXAMPLE:
CAN-LZR & CANCCR-LZR

E9 **UNECE REGULATIONS**

Please scan the QR code to view all UNECE Certificates and information.



LAZER
HIGH PERFORMANCE LIGHTING

WWW.LAZERLAMPS.COM

We appreciate your purchase of a Lazer Lamps product, and value your feedback. If you would like to leave feedback on your Lazer experience, please head to the relevant product page on our website www.lazerlamps.com.

T +44 (0) 1992 677374
E sales@lazerlamps.com

Lazer Lamps Ltd, Calder House, Central Road
Harlow, Essex, CM20 2ST, UK

 **MADE IN THE UK**     **/LAZERLAMPS**



MERCEDES VITO (2024+) TRIPLE-R 750 GRILLE KIT

FITTING INSTRUCTIONS




WHAT'S INCLUDED

- 4x Grille Mounting Brackets
- 4x Cutter Guides
- Anti-Theft Fasteners & Key
- Fitting Instructions

Additionally - Kit Includes:


- 2x Triple-R 750 LED Lights
- 1x Two-Lamp Wiring Kit

TOOLS REQUIRED

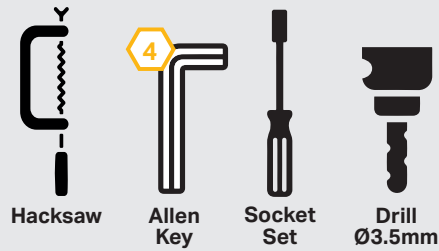

TORQUE VALUES

The code is written on the inside of each bracket (see example).

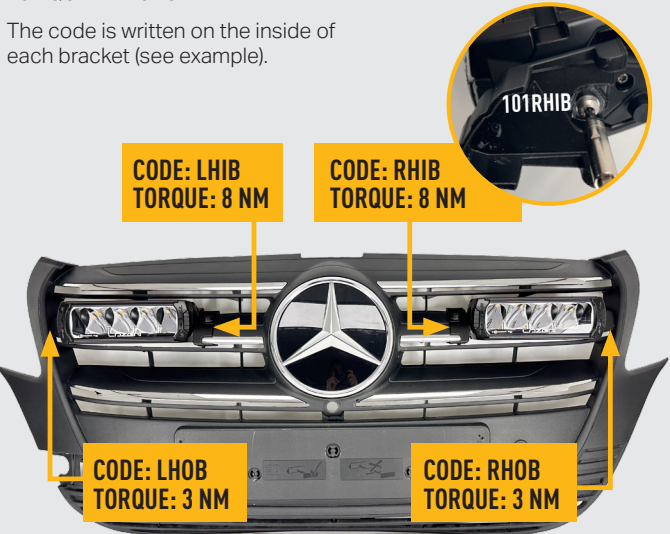

INSTALLATION PROCESS - Grille will need to be removed from the vehicle (please see vehicle manufacturer's guide) for steps 1 & 2.

1

Cut the Air guides that are located behind the grille as per the measurements shown to allow clearance for the lamp.

Complete step on both sides.

2

The side air guide will also need to be cut to allow clearance for the lamps. Follow the measurements shown (measure from the bottom of the headlamp).

Complete step on both sides.

Re-attach the grille. Next steps to be complete with grille on the vehicle.

3

4

5

6

Torque info see adjacent.

Please use a thread seal compound (i.e. Loctite 222) to protect the lamp fastener from binding over time.

7

8

9

Ø3.5mm

10

11